


## PTFE Nozzle Liners

The non-adhesive characteristic of PTFE retards build-up of solids. When installed in the nozzle opening of reactors and other process equipment, the PTFE liner can be easily cleaned without damaging fragile linings of expensive equipment. PTFE liners are designed to reduce transmission of vibration or shock to flange faces of such equipment and the smooth, tough surface of PTFE minimizes the effects of erosion. Liner is designed to fit inside Schedule 80 Pipe.

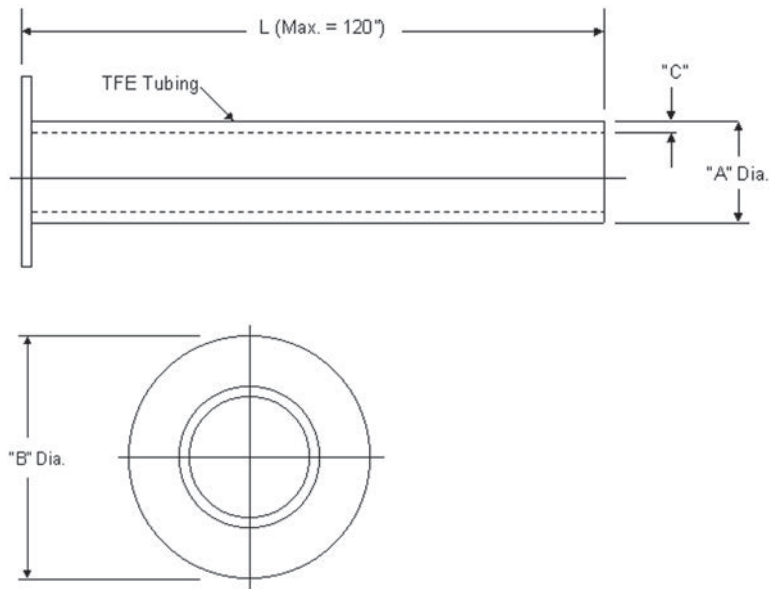

Size (NPS)	Size (DN)	Dimensions					
		A		B		C	
		inch	mm	inch	mm	inch	mm
1/2	15	0.525	13	1 3/8	35	0.055	1.4
3/4	20	0.700	18	1 11/16	43	0.055	1.4
1	25	0.900	23	2	51	0.060	1.5
1 1/2	40	1.460	37	2 7/8	73	0.060	1.5
2	50	1.900	48	3 5/8	92	0.065	1.7
3	80	2.840	72	5	127	0.073	1.9
4	100	3.770	96	6 3/16	157	0.125	3.2
6	150	5.700	145	8 1/2	216	0.140	3.6
8	200	7.500	191	10 5/8	270	0.160	4.1
10	250	10.010	254	12 3/4	324	0.185	4.7
12	300	11.950	304	15	381	0.185	4.7
14	350	11.575	294	16 1/4	412	0.217	5.5
16*	400	14.055	357	18 1/2	470	0.256	6.5
18*	450	16.299	414	20 1/2	520	0.256	6.5
20*	500	17.480	444	23	585	0.256	6.5
24*	600	22.047	560	27	685	0.177	4.5