

# **CTHK - Teflon® Convoluted Bore Chlorine Hose**

Inner core: "Seamless" conductive

convoluted Teflon® PTFE

Reinforcement: Kynar® double braid

Temperature: -40 °F to 350 °F

External Protection: HDPE plastic spiral

quard

#### Construction

Extra-thick, "seamless" helical convoluted Teflon® PTFE liner braided with Kynar PVDF, and HDPE spiral guard as a protective cover (per the Chlorine Institute pamphlet 6 guidelines.)

## Benefits

- Fully complies with the guidelines of The Chlorine Institute Pamphlet 6, Appendix A for Chlorine Transfer Hose
- Open pitched, helical convolutions for easy cleaning
- Rated for full vacuum
- Designed to handle the rigors of everyday handling at chlorine transfer stations
- Tighter bend radii than smooth bore alternatives

## Applications

For use with Chlorine/Bromine transfers from shipping containers to stationary equipment (rail, truck, and cylinder) and cylinder filling stations.

■ Fittings: Monel® Crimp Style

Hastelloy® also available. Consult factory.








CGA 820 (1/2" hose only)




### CTHK HOSE PRESSURE RATINGS

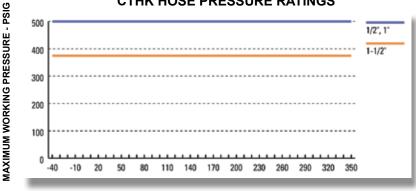

**OPERATING TEMPERATURE (F)** 


NOTE: Hose assembly pressure ratings may be limited by the fittings.

## **CTHK HOSE VACUUM RATINGS**

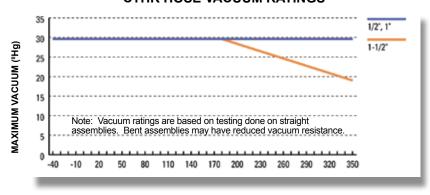


**OPERATING TEMPERATURE (F)** 

| Nominal Size |    | Hose ID |      | Hose OD |      | Bend Radius |       | Max. Working Pressure at 70°F (21°C) |      | Burst Pressure at 70°F (21°C) |       | Weight   |
|--------------|----|---------|------|---------|------|-------------|-------|--------------------------------------|------|-------------------------------|-------|----------|
| Inch         | DN | Inch    | ММ   | Inch    | ММ   | Inch        | ММ    | PSIG                                 | BAR  | PSIG                          | BAR   | Lbs / Ft |
| 1/2          | 15 | 0.470   | 11.9 | 0.748   | 19.0 | 2           | 50.8  | 500                                  | 34.5 | 2500                          | 172.4 | .15      |
| 1            | 25 | 0.970   | 24.6 | 1.354   | 34.4 | 4           | 101.6 | 500                                  | 34.5 | 2500                          | 172.4 | .33      |
| 1-1/2        | 40 | 1.540   | 39.1 | 2.034   | 51.7 | 6           | 152.4 | 375                                  | 25.9 | 1875                          | 129.3 | .60      |



| Fitting Type      | Fitting # |  |  |  |
|-------------------|-----------|--|--|--|
| CGA820(1/2" Only) | 23 M 0    |  |  |  |
| MNPT Monel        | 10 M 0    |  |  |  |
| MNPT Hastelloy    | 10H0      |  |  |  |
| Monel/Monel Flg   | 30 M R    |  |  |  |
| Monel/Hast Flg    | 30 H H    |  |  |  |
| Monel/CS Flg      | 3 0 M B   |  |  |  |
| Hast/CS Flg       | 3 0 H B   |  |  |  |
| •                 |           |  |  |  |



Accessory Code Ε

HDPE Spiral Guard: E

Other Accessories See